



PC2000-series 1000 to 2000W

Input / Output

- Optimized inputs from 20 to 300 Vd.c.
- Single outputs from 24 to 48 Vd.c.
- Inrush current limit.
- Reverse input voltage protection.

Features

- Alarm circuit with relay output.
- External voltage sense.
- Current sharing.
- Inhibit / Power down input.
- Over voltage protection OVP.
- Output voltage adjustable on frontpanel

Operation

- High efficiency >89%.
- Operating temperature range -25 to +55°C.
- Convection cooled 1000W.
- Fan cooled up to 1400 to 2000W.

EMC

- EN61000-6-2, Immunity.
- EN61000-6-3, Emission.
- EN/IEC61000-4-3, 20V/m
- EN/IEC61000-4-4, 4kV.
- EN/IEC61000-4-5 level 2&3.
- EN50121-3-2

Input and output ratings

Nominal inputs	Input range	Stop level	Code
24 Vd.c.	20 to 32V	<16.8Vd.c.	24
48 Vd.c.	43 to 60V	<33.6Vd.c.	48
110, 127 Vd.c.	93 to 150V	<77Vd.c.	110
220, 250 Vd.c.	187 to 300V	<154Vd.c.	220

Other input ranges can be made on demand.

Input range, is the range we guarantee full output performance, Uout +10%, Iout +5%.

The converter works down to the stop levels.

The output voltage might decrease to approx -10% of nominal output at the stop level.

Voltage	Output	
	Current	Power
24V	42 - 58A	1000 - 1400W
28V	36 - 50A	1000 - 1400W
36V*	28 - 56A	1000 - 2000W
48V	21 - 42A	1000 - 2000W

* NRE might be charged

Output ratings and type code

Output			Input				
Voltage	Current	Power	20 - 32V	43 - 60V	93 - 150V	187 - 300V	Cooling
24V	42A	1000W	PC1000 24/24	PC1000 48/24	PC1000 110/24	PC1000 220/24	Convection
24V	58A	1400W		PC1400 48/24	PC1400 110/24	PC1400 220/24	Fan
28V	36A	1000W	PC1000 24/28	PC1000 48/28	PC1000 110/28	PC1000 220/28	Convection
28V	50A	1400W		PC1400 48/28	PC1400 110/28	PC1400 220/28	Fan
36V	28A*	1000W	PC1000 24/36	PC1000 48/36	PC1000 110/36	PC1000 220/36	Convection
36V	56A*	2000W		PC2000 48/36	PC2000 110/36	PC2000 220/36	Fan
48V	21A	1000W	PC1000 24/48	PC1000 48/48	PC1000 110/48	PC1000 220/48	Convection
48V	42A	2000W		PC2000 48/48	PC2000 110/48	PC2000 220/48	Fan

* NRE might be charged

How to read our product code:

Example **PC1000 24/48**

PC1000 = Family code and power rating

24 = input voltage code 24

48 = Output voltage 48V

Features

- **Current Sharing**
Current sharing is used to balance the load between up to 10 units working in parallel.
- **External output voltage sense**
External sense is used when the voltage regulation at the load is critical.
See output data page 3
The sense can compensate voltage drops up to 5% of the nominal voltage.
- **Alarm circuit**
The alarm relay switches to "ALARM" state if:
 - * The output voltage is not within -10 to +15% of nominal output voltage.
 - * The converter is overheated.
- **Over voltage protection OVP**
A second regulation circuit takes over in case the main regulation fails. The output voltage is limited to approximately +15% over nominal output voltage.
- **Inhibit input / Power down**
The converter will shutdown if the inhibit input is short-circuited by a relay or electrical switch. The current through the short-circuit is 20mA. Note that there is no electrical isolation between the inhibit and the output.
- **Inrush current limit and Reverse voltage protection**
All models have an inrush current limit circuit. In case the input is connected in reverse voltage the converter will not start. The reverse voltage do not damage the input of the converter.
- **Electrical Safety Installation Class**
The PC2000 series can be installed in different networks, see page 4.

Optional Features

- **Series diode on output**
Specify series diode output when the output is connected in parallel with other power supply to achieve redundancy.
The output is derated 10% on 24V and 5% on 48V.
- **Conformally coating; tropical version**
For use in weather protected area with high ambient humidity or large temperature gradients producing condensation.
- **Train input**
Input voltage range according to train standard EN50155 and IEC60571. See T-input below.

T-input ranges for Mobile applications

Code	Continuous range	Uin 0.1s- S2
24T	16.8 - 30Vd.c.	14.4 - 33.6Vd.c.
36T	25.2 - 45Vd.c.	21.6 - 50.4Vd.c.
48T	33.6 - 60Vd.c.	28.8 - 67.2Vd.c.
72T	50.4 - 90Vd.c.	43.2 - 100.8Vd.c.
110T	77 - 137.5Vd.c.	66 - 154Vd.c.

The total output power can be derated on a T-range compared to the output rating table, page 2.

Input voltage range according to train standard EN50155:2001 and IEC60571:1998.

General data / input data

Design topology	Push-Pull
Switching frequency	60 kHz
Emission / immunity	See page 4
Safety EN/IEC60950-1:2001	See page 4
Max. accepted input ripple ¹ 50-400Hz	2% of nominal voltage
Input power at no load	
Input code 24	<8 W
Input code 48, 110,	<17 W
Input code 220	<21 W
Reverse input voltage protection	In start up sequence ²
Inrush current limit	Yes <10xI _{nom}
Dimensions (D x W x H)	285x420x87mm
Weight	8.5 kg

1. Higher ripple affects the input, contact factory.
2. The converter do not start at reverce voltage.

Output data

Source regulation	0.1%
Load regulation (0-100% load) with sense connected	0.2%
Load regulation (0-100% load)	0.5%
Transient recovery time for 10%-90% load step to within 3% of nominal output voltage.	<3ms
Output ripple (120kHz) ³	Typ. 30mV p-p
Input ripple attenuation to output (50 to 400 Hz).	150:1
Emission / Immunity	See page 4
Temperature coefficient	0.02% /°C
Min output adjustment range adjustable with a 15 turn potentiometer	95% to 110%
Current limit, rectangular.	105%
Remote sense	Yes
Soft start	Yes
Alarm relay rating (a.c. & d.c.)	30V 300mA
Start-up time	<3s
Hold-up time, contact factory	2-25ms
Efficiency ⁴	89-93%
Operating temperature range at 100% load. (Convection cooling.)	-25 to +55°C
with derating ⁵	-25 to +70°C
Storage temperature range	-40 to +85°C

3. Output ripple might increase to 0.5% RMS of V_{out}, when EN/IEC61000-4-3, 20V/m test is applied
4. Lowest efficiency measured within the whole input voltage range at 100% load.
5. Contact factory for derating as it depends on model. The alarm relay can not be used at +70°C.

Mechanical drawing

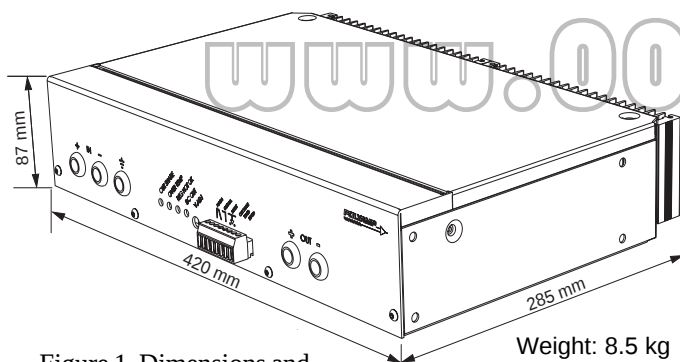


Figure 1. Dimensions and front panel for 24, 48 input code.


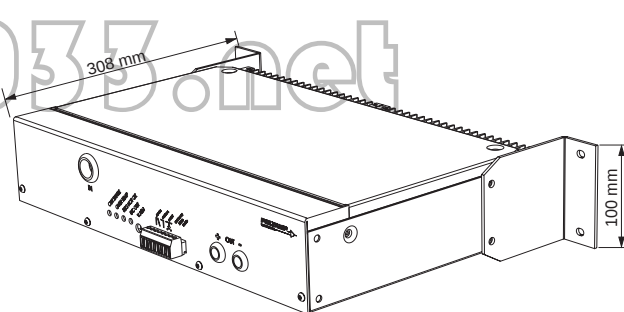


Figure 2. Wall mounting L100-1 and front panel for inputs >60V.

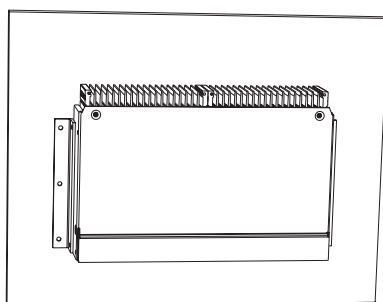

PC2000 wall mounted.
Using mounting brackets
L216-1 (Optional). Only for fan
cooled types.

Figure 3. Wall mounting.

3x Single unit PC2000 mounted
as one 2U 19" unit using standard
brackets L89-3.

3x Single unit PC2000
mounted backwards as one
2U 19" unit using standard
brackets L89-3.

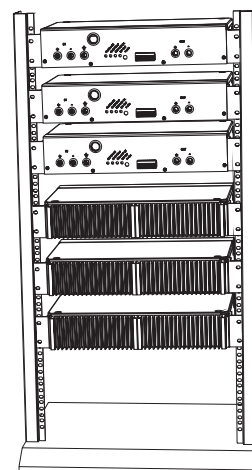


Figure 4. 19"-rack mounting.